

Technical data sheet

**street
furniture
works**

Product **Broadmead bollard (removable)**
Date **November 2015**
Weight **10kg approx. & 5kg for socket**
Material **304 grade radially grained stainless steel**
2mm wall thickness

Fixing guidelines

Below ground socket baseplate fixing only.

Baseplate to bottom of socket bolted to below ground concrete foundation via 4No. resin bonded M8 stainless steel threaded anchor rods.


CONCRETE FOUNDATION AND FIXINGS MUST BE TO OWN ENGINEERS FINAL SPECIFICATION AND APPROVAL

Extras

316 Grade stainless steel, Electropolished finish; fixed version; visibility bands in most RAL colours

Maintenance

Regularly inspect and assess for safety, operation, function and appearance (SOFA). Carefully check for any loose, broken or defective parts, integrity of the welding particularly for rocking or lateral movement and for free operation and fit of hinge flap. The hinge plate can be replaced without removing socket/groundworks. Vinyl banding can be replaced on site if necessary if they become scuffed or snagged. Consult Street Furniture Works for more extensive refurbishment or repair advice. See also Cleaning and Maintenance of Stainless Steel by Street Furniture Works.

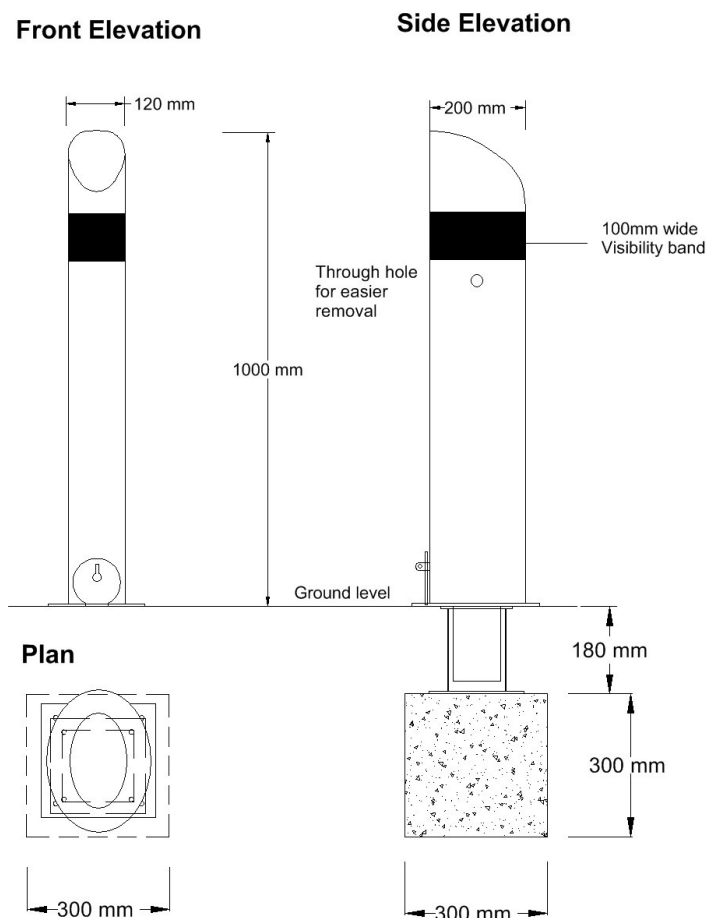

Street Furniture Works Ltd
2nd Floor 7 Nova Scotia Place
Spike Island
Bristol BS1 6XJ
telephone 0117 403 3604
sales@streetfurnitureworks.info
www.streetfurnitureworks.info