Technical data sheet

Product Bertie bench
Date November 2015
Weight 125kg approx.

Material 304 grade grained stainless steel 4 & 8mm thickness

FSC Iroko hardwood seat panels oiled

Size L1988 x W450 x H450mm

Fixing quidelines - Below ground or surface mounted.

Baseplate to bottom of seat legs bolted to below ground concrete foundation via 8No. (4 per leg) resin bonded M10 threaded S/S anchor rods OR surface mounted with extension plates without holes for stand alone or with holes for surface anchorage.

CONCRETE FOUNDATION AND FIXINGS MUST BE TO OWN ENGINEERS FINAL SPECIFICATION AND APPROVAL

Options

Intermediate armrests, 316 Grade stainless steel, Skateboard deterrents; Electropolished or Powder coated finish; cover plates to conceal grouting.

Maintenance


Regularly inspect and assess for safety, operation, function and appearance (SOFA). Carefully check for any loose, broken or defective parts and integrity of the welding and particularly for rocking or lateral movement. Chips to powder coating can be touched up with wet paint to same RAL colour. Consult Street Furniture Works for more extensive refurbishment or repair advice.

See also Cleaning and Maintenance of Stainless Steel and Hardwoods sheets by Street Furniture Works.

Plan



Front Elevation

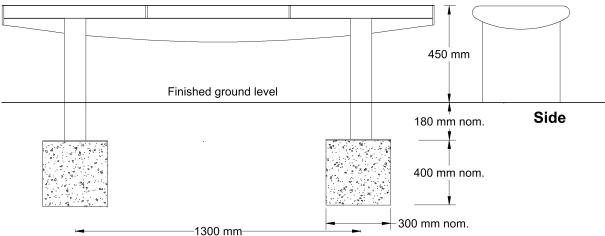

Street Furniture Works Ltd
2nd Floor 7 Nova Scotia Place
Spike Island
Bristol BSI 6XJ
telephone 0117 403 3604
sales@streetfurnitureworks.info
www.streetfurnitureworks.info

street

furniture

works